
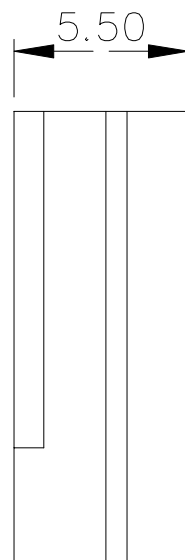


SPECIFICATIONS

Current rating : 3.0A AC,DC
 Voltage rating : 250V AC,DC
 Temperature range : -25°C to +85 °C
 Contact resistance : 20mΩ Max.
 Insulation resistance : 1000MΩ Min.
 Withstanding voltage : 800V AC/minute
 Material : Nylon 66, UL94V-0

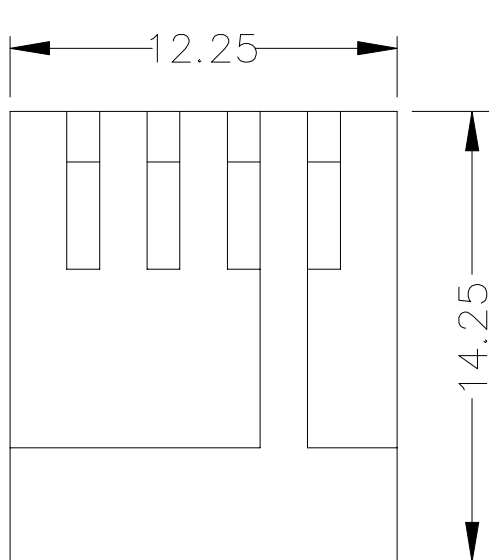

 承洧科技股份有限公司
 Cherng Weei Technology Corp.

DESCRIPTION(內容):
2.54mm Wire-to-Board Housing (RoHS)

PART NO:
 (料號) CS4-H1114-04
 DWG NO(圖號): 2442-H-04

DRAWN(製圖):
ZHANG
 CHECKED(確認):
TERESA
 APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
 (公差)
 X.XX ± 0.1
 X.X ± 0.5
 SCALE(比例):
FREE

REV: **R0**
 UNIT:
mm
 SIZE:
A4
 SHEET:
1/1

REV	DESCRIPTION	DATE
R0		2023.09.19
R1		
R2		
R3		

A

B

C

D

E