

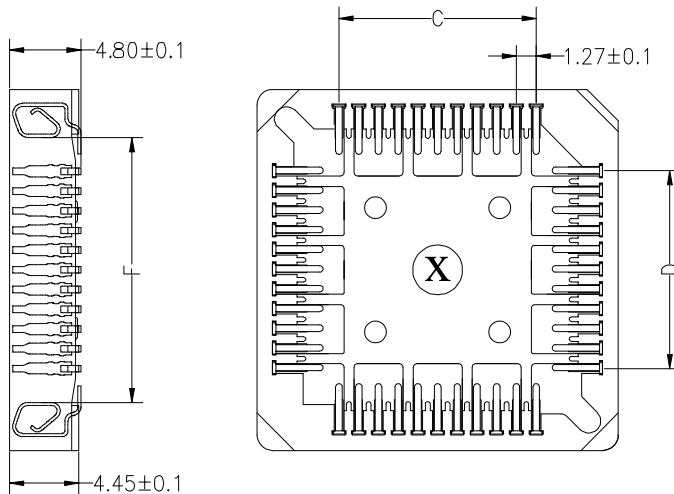


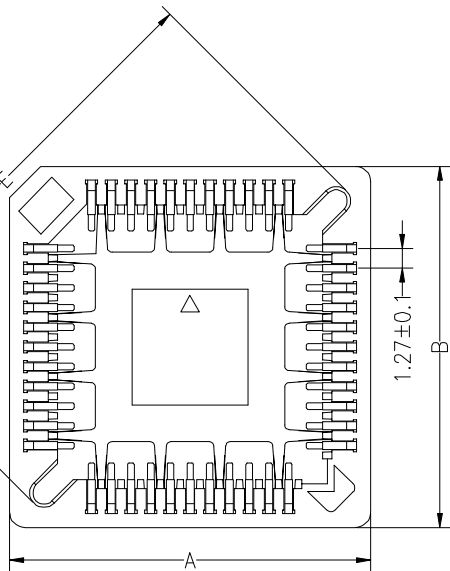

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
Contact Plating:Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PPS Brown

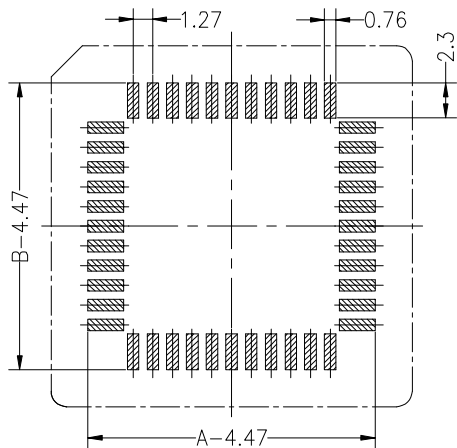

PCB LAYOUT



规格	A±0.2	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2
20P	15.65	15.65	5.08	5.08	17.28	9.36
28P	18.19	18.19	7.62	7.62	20.87	12.00
32P	18.15	20.65	7.62	10.16	22.50	14.40
44P	23.27	23.27	12.70	12.70	28.30	16.99
52P	25.81	25.81	15.24	15.24	31.65	19.54
68P	30.89	30.89	20.32	20.32	38.83	24.62
84P	35.97	35.97	25.40	25.40	46.00	29.70