





Specifications:  
Contact Resistance: 30mΩ max.at DC 100 mA  
Insulator Resistance: 1000MΩ min.at DC 500v  
Current Rating: 1AMP  
Electric Withstanding  
Voltage: AC 500V For 1minute  
Operating Temperature: -55 °C - +105 °C  
Contact: Phosphor Bronze  
Electroplate: Bright tin 100U" ±10U"  
Housing: PPT&30% Glass Fiber

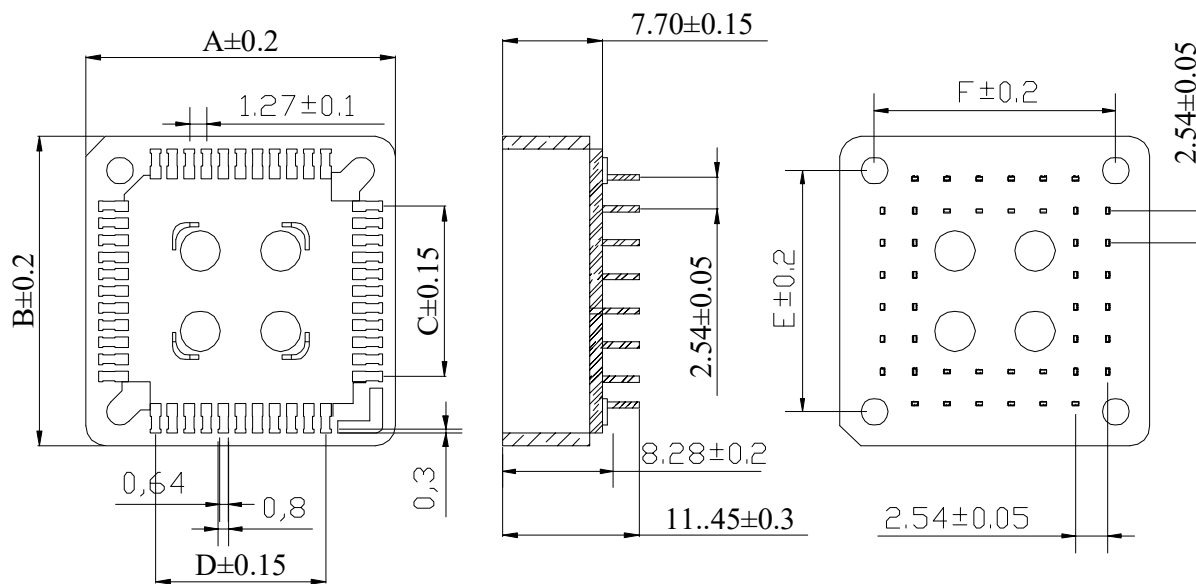

PART:  
CPLC00XXDXX-PPS-CF1449

BLANK:BLACK  
BR:BROWN

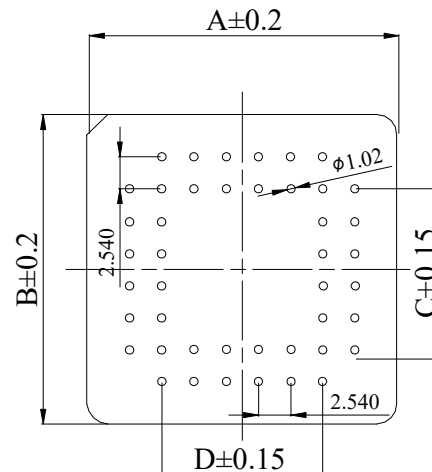

PCB LAYOUT

| Position | A     | B     | C     | D     | E     | F     |
|----------|-------|-------|-------|-------|-------|-------|
| 28       | 18.09 | 18.09 | 7.62  | 7.62  | 12.90 | 12.90 |
| 32       | 18.04 | 20.60 | 7.62  | 10.16 | 15.40 | 12.90 |
| 44       | 23.10 | 23.10 | 12.70 | 12.70 | 18.00 | 18.00 |
| 52       | 25.70 | 25.70 | 15.24 | 15.24 | 20.50 | 20.50 |
| 68       | 30.80 | 30.80 | 20.32 | 20.32 | 25.75 | 25.75 |
| 84       | 35.95 | 35.95 | 25.40 | 25.40 | 30.90 | 30.90 |