




No.of CKTS	A	B	C
04	3.00	5.10	7.00
05	4.00	6.10	8.00
06	5.00	7.10	9.00
07	6.00	8.10	10.00
08	7.00	9.10	11.00
09	8.00	10.10	12.00
10	9.00	11.10	13.00
11	10.00	12.10	14.00
12	11.00	13.10	15.00
13	12.00	14.10	16.00
14	13.00	15.10	17.00
15	14.00	16.10	18.00
16	15.00	17.10	19.00
17	16.00	18.10	20.00
18	17.00	19.10	21.00
19	18.00	20.10	22.00
20	19.00	21.10	23.00
21	20.00	22.10	24.00
22	21.00	23.10	25.00
23	22.00	24.10	26.00
24	23.00	25.10	27.00
25	24.00	26.10	28.00
26	25.00	27.10	29.00
27	26.00	28.10	30.00
28	27.00	29.10	31.00
29	28.00	30.10	32.00
30	29.00	31.10	33.00
31	30.00	32.10	34.00
32	31.00	33.10	35.00
33	32.00	34.10	36.00
34	33.00	35.10	37.00
35	34.00	36.10	38.00

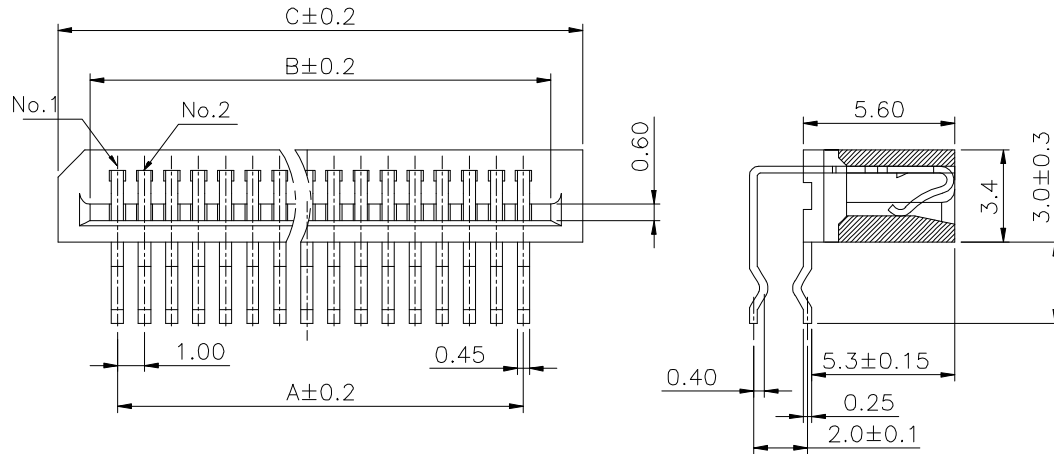

Specifications:
Rating:
Current Rating:0.5 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-25°C~+85°C

Electrical:
Contact resistance:40m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

Material And Finish:
Housing:Nylon 46 UL94V-0 Natural
Terminal:Phosphor Bronze,
Plating:Matte Tin plated

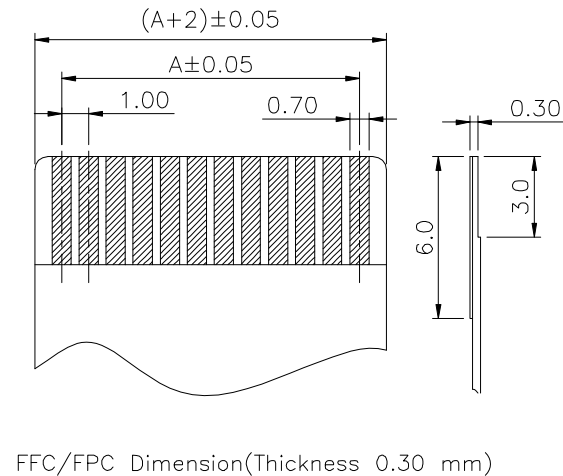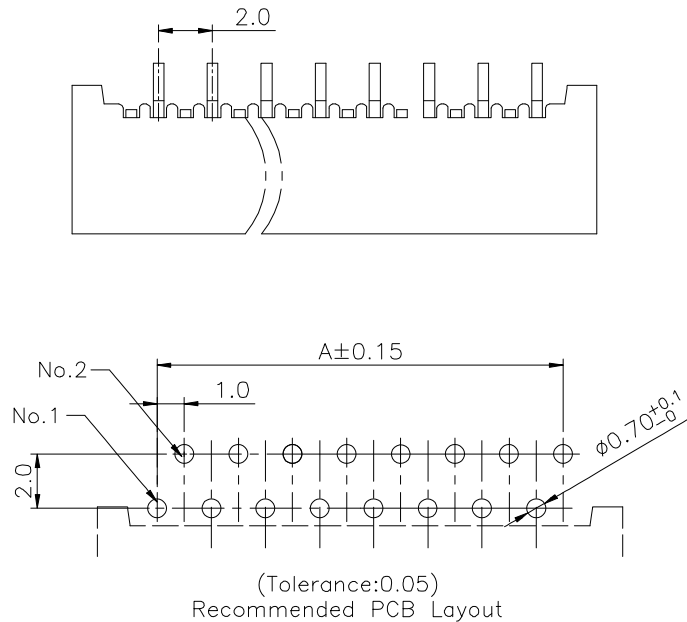

FPC/FPC Dimension(Thickness 0.30 mm)