
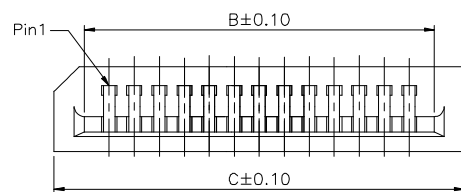


1



Specifications:

Rating:
Current Rating:0.4 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-20°C~+80°C

Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:200V AC/Minute

Material And Finish:

Insulator:PA46 UL94V-0 Natural
Contact:Copper Alloy,
Plating:Tin Plated Over Nickel

PART NO. :




FPC255M3XX-ATT-CF1337

T:Tube Packing

04 ~ 35PIN



2

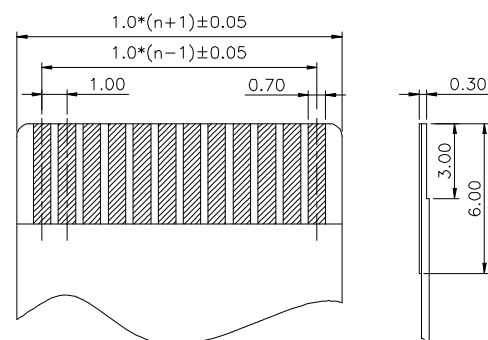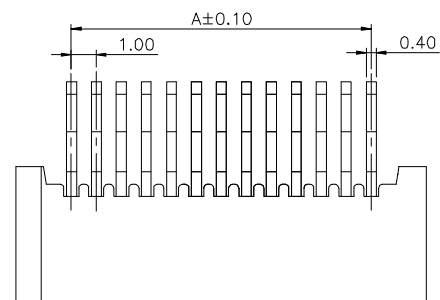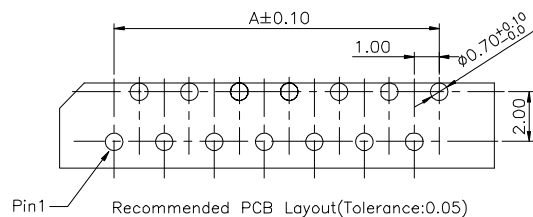

FFC/FPC Dimension(Thickness 0.30 mm)

3

DESCRIPTION(内容):

FPC 1.0mm 180° DIP
(RoHS)

PART NO:
(料 號) FPC255M3XX-ATT-CF1337

DWG NO(圖號): 0010255-XX2321

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

. X ±0.20
. XX ±0.10

SCALE(比例):

FREE

REV:
R2

UNIT:
mm

SIZE:

A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

變更端子鍍層選項

修改尺寸公差

DATE

2018.04.30

2018.05.31

2019.04.17

A

B

C

D

E

CF13

No.	A	B	C
04	3.00	5.10	7.00
05	4.00	6.10	8.00
06	5.00	7.10	9.00
07	6.00	8.10	10.00
08	7.00	9.10	11.00
09	8.00	10.10	12.00
10	9.00	11.10	13.00
11	10.00	12.10	14.00
12	11.00	13.10	15.00
13	12.00	14.10	16.00
14	13.00	15.10	17.00
15	14.00	16.10	18.00
16	15.00	17.10	19.00
17	16.00	18.10	20.00
18	17.00	19.10	21.00
19	18.00	20.10	22.00
20	19.00	21.10	23.00
21	20.00	22.10	24.00
22	21.00	23.10	25.00
23	22.00	24.10	26.00
24	23.00	25.10	27.00
25	24.00	26.10	28.00
26	25.00	27.10	29.00
27	26.00	28.10	30.00
28	27.00	29.10	31.00
29	28.00	30.10	32.00
30	29.00	31.10	33.00
31	30.00	32.10	34.00
32	31.00	33.10	35.00
33	32.00	34.10	36.00
34	33.00	35.10	37.00
35	34.00	36.10	38.00