
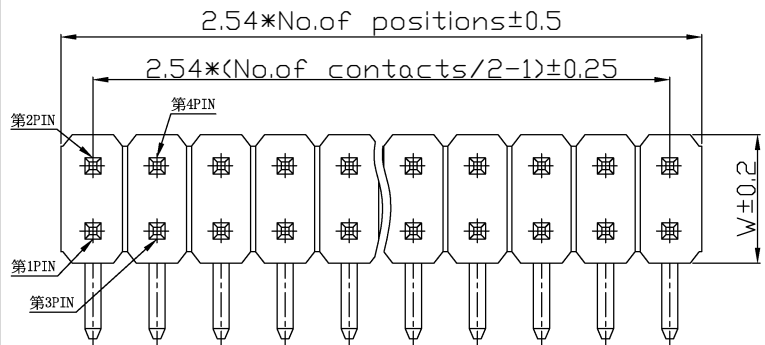
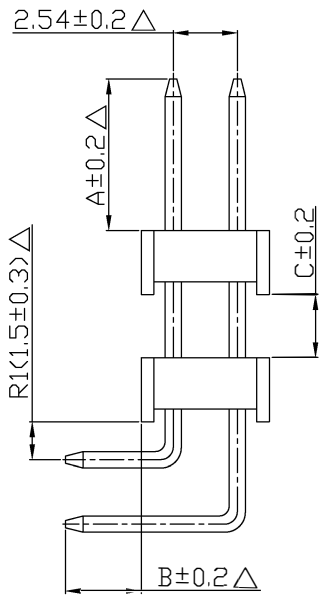


P. C. B Hole Layout

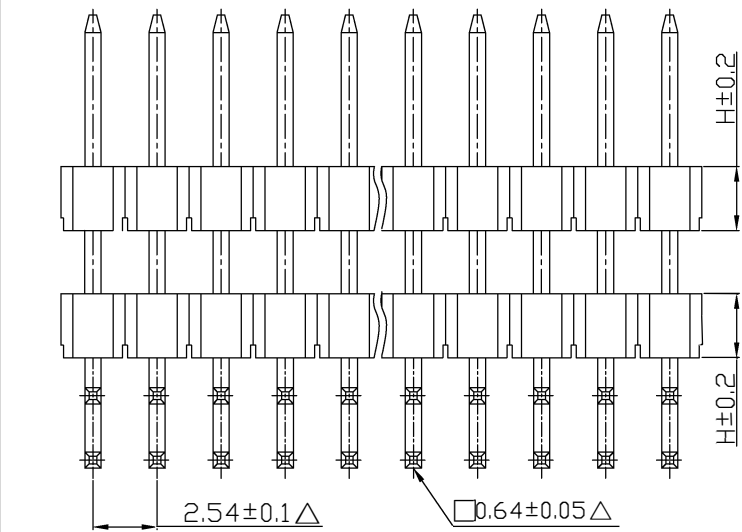

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/LCP/NL-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P221	-	X	X	A / C / B	- X X
(Pin Header Dual Row)	R:Right Angle Type R1:1.5mm	G:Gold Flash T:Thin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T C:LCP (Standard:P)	A (060) C (025) B (030) (If you desire on other length, by marking put desired in the A/C/B)	(02-80 Contacts)

Selectivity:

- ☐ P221 (H:2.54 W:5.08) (Material (Sandard):PBT)
- ☐ P222 (H:1.7 W:5.08) (Material (Sandard):Nylon-6T)
- ☐ P223 (H:1.5 W:5.08) (Material (Sandard):Nylon-6T)

Dim(6.0/2.5/3.0):

A:_____ C:_____ B:_____



DESCRIPTION(内容):
2.54mm Pin Header H:2.54 90° □=0.64 (RoHS)
PART NO: (料 號)
DWG NO(圖號):

DRAWN(製圖):
CHECKED(確認):
APPROVAL(核准):

GENERAL TOLERANCE: (公差)
X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°
SCALE(比例): 1:XX

REV: A/1
UNIT: mm
SIZE: A4
SHEET: 1/1

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	
2		
3		
4		