




- MATERIAL  
INSULATOR: PBT +30% GLASS FIBER (UL94V-0).BLUE  
CONTACT: BRASS(C2680).  
PLATING: GOLD OVER NICKEL.

- SPECIFICATION  
CURRENT RATING: 3 AMP.  
INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.  
CONTACT RESISTANCE: 20 MILLIOHMS MAX.  
VOLTAGE : 500V FOR ONE MINUTE.

- ENVIRONMENTAL  
TEMPERATURE RANGE: -40°C TO +85°C.

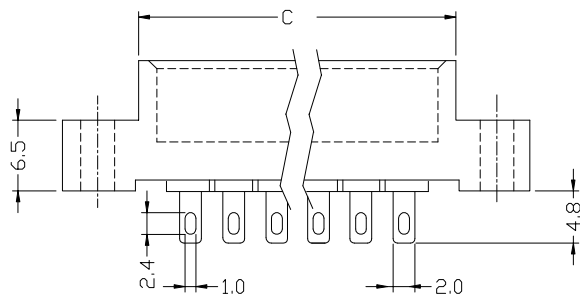

SOLDER TYPE (P/N: CKSL-XXS)

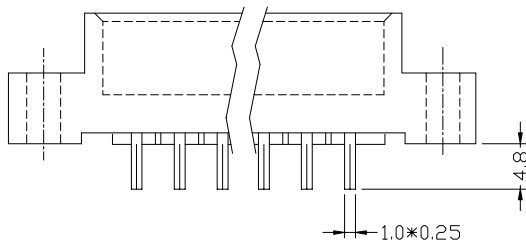

DIP TYPE (P/N: CKSL-XXD)



Circuit	Dimension					Circuit	Dimension				
	A	B	C	D	E		A	B	C	D	E
10	15.84	24.06	27.40	34.94	41.24	64*	122.76	130.98	134.32	141.86	148.16
12	19.80	28.02	31.36	38.90	45.20	70*	134.64	142.86	146.20	153.74	160.04
16	27.72	35.94	39.28	46.82	53.12	72	138.60	146.82	150.16	157.70	164.00
20	35.64	43.86	47.20	54.74	61.04	80*	154.44	162.66	166.00	173.54	179.84
24	43.56	51.78	55.12	62.66	68.96	86	166.32	174.54	177.88	185.42	191.72
26*	47.52	55.74	59.08	66.62	72.92						
28*	51.48	59.70	63.04	70.58	76.88						
30	55.44	63.66	67.00	74.54	80.84						
32*	59.40	67.62	70.96	78.50	84.80						
36	67.32	75.54	78.88	86.42	92.72						
40	75.24	83.46	86.80	94.34	100.64						
44	83.16	91.38	94.72	102.26	108.56						
48	91.08	99.30	102.64	110.18	116.48						
50	95.04	103.26	106.60	114.14	120.44						
56	106.92	115.14	118.48	126.02	132.32						
60	114.84	123.06	126.40	133.94	140.24						
62	118.80	127.02	130.36	137.90	144.20						

\* ARE NOT READY



DESCRIPTION(內容):  
**3.96 PITCH WITH MOUNTING EAR (RoHS)**  
PART NO: (料號) **CKSL-XXX**  
DWG NO(圖號): **KSL-XX(S)&(D)**

DRAWN(製圖): **MIMI**  
CHECKED(確認): **MAMDY**  
APPROVAL(核准): **JOHNNY**

GENERAL TOLERANCE: (公差)  
0-10 ±0.2 10-30 ±0.3  
30-100 ±0.4 100-300 ±0.5  
OVER 300 ±0.6 ANGULAR ±0.5°  
SCALE(比例): **FREE**

REV: **R3**  
UNIT: **mm**  
SIZE: **A4**  
SHEET: **1/1**

REV	DESCRIPTION	DATE
<b>R0</b>	環保料	<b>2006.07.05</b>
<b>R1</b>	變更環保章字樣	<b>2006.08.16</b>
<b>R2</b>	增加 Layout圖式	<b>2006.10.17</b>
<b>R3</b>	更新圖面	<b>2026.04.02</b>