



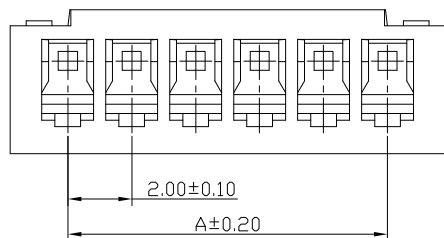

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC




Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0,Color:153C~154C

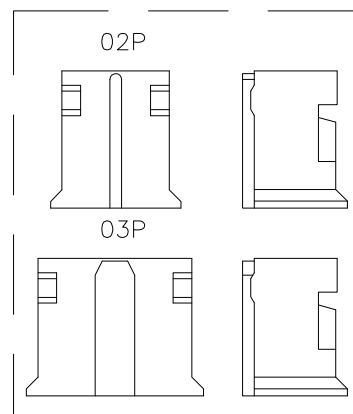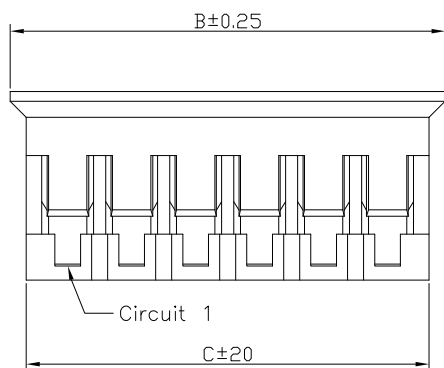

Circuit No.	Dimensions		
	A	B	C
02P	2.00	5.60	4.60
03P	4.00	7.60	6.60
04P	6.00	9.60	8.60
05P	8.00	11.60	10.60
06P	10.00	13.60	12.60
07P	12.00	15.60	14.60
08P	14.00	17.60	16.60
09P	16.00	19.60	18.60
10P	18.00	21.60	20.60
11P	20.00	23.60	22.60
12P	22.00	25.60	24.60
13P	24.00	27.60	26.60
14P	26.00	29.60	28.60
15P	28.00	31.60	30.60



DESCRIPTION(內容):

**2.0mm Wire-to-Board Housing
(RoHS)**

PART NO:
(料 號) CAE-H20-XX

DWG NO(圖號): A2100H-XP

DRAWN(製圖):

Larry

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.25
.XX ±0.15
.XXX ±0.05

SCALE(比例):

FREE

REV:
R1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

更換確認章

DATE

2013.12.12

2019.09.02