
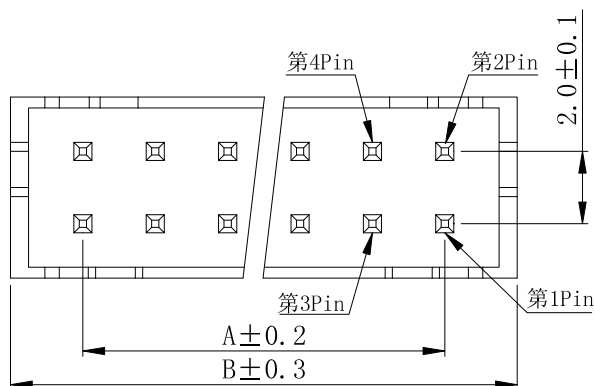
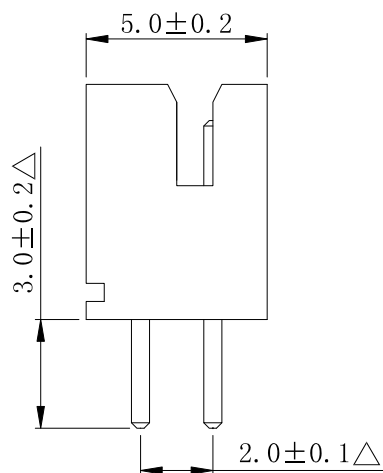


P. C. B Hole Layout

SPECIFICATIONS

Current rating	:2A AC, DC
Voltage rating	:250V AC, DC
Temperature range	: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
Contact resistance	:10m Ω Max
Insulation resistance	:1000M Ω Min
Withstanding voltage	:800 V AC/minute
Pin Material	:Brass
Finished	:Tin-plated
Housing Material	:Nylon-66+30%GF, UL94V-0
Color	:Nature

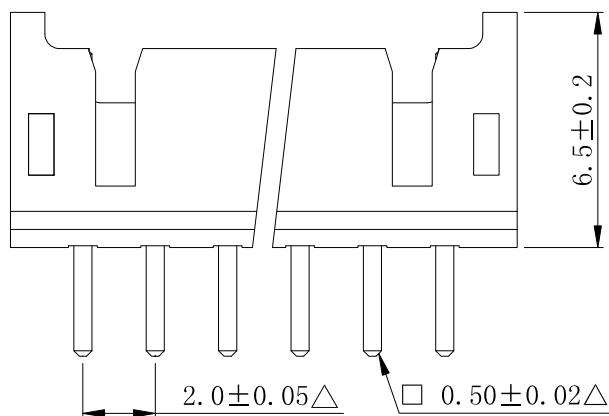

Circuits	Dimension mm	
	A	B
2X02	2.00	6.00
2X03	4.00	8.00
2X04	6.00	10.00
2X05	8.00	12.00
2X06	10.00	14.00
2X07	12.00	16.00
2X08	14.00	18.00
2X09	16.00	20.00
2X10	18.00	22.00
2X11	20.00	24.00
2X12	22.00	26.00
2X13	24.00	28.00
2X14	26.00	30.00
2X15	28.00	32.00
2X16	30.00	34.00
2X17	32.00	36.00
2X18	34.00	38.00
2X19	36.00	40.00
2X20	38.00	42.00



CHERNG WEEI

DESCRIPTION(内容):
2.0mm Wafer 180°
塑膠為本色(RoHS)

PART NO:
(料號) **CCP-HD20-2xXX**

DWG NO(圖號):

DRAWN(製圖):
李建安

CHECKED(確認):
李建安






APPROVAL(核准):
邓文广

GENERAL TOLERANCE:
(公差)
.0 ±0.20
.00 ±0.15


SCALE(比例):
1:XX

REV:
A/3
UNIT:
mm
SIZE:
A4
SHEET:
1/2

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	2007.07.18
2	料號由CP-HD20-2*XX改為CCP-HD20-2*XX	2007.10.30
3	增加Pin數	2011.08.15
4		

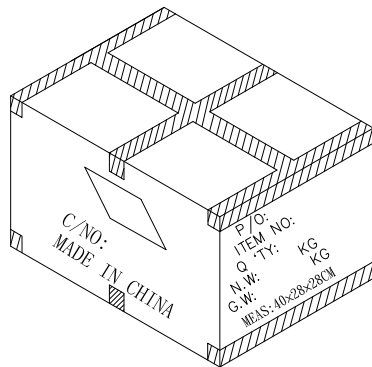

Part No:		承洊料號
Description:		品名規格
Quantity:		數量
Date:		日期



- 紙箱規格：400*280*280mm (單重:620g).
- 封箱方式 (看上圖所示)：外箱四周使用透明的封箱膠帶封住,並封成王字型.
- 紙箱上面一定要寫數量、毛重和淨重.

PIN數	包材規格	每袋數量
2X02	15X18	1000/PCS
2X03	15X18	1000/PCS
2X04	18X20	1000/PCS
2X05	18X25	1000/PCS
2X06	18X25	1000/PCS
2X07	18X25	1000/PCS
2X08	18X25	1000/PCS
2X09	20X28	1000/PCS
2X10	20X28	1000/PCS
2X11	18X25	500/PCS
2X12	18X25	500/PCS
2X13	18X25	500/PCS
2X14	18X25	500/PCS
2X15	20X28	500/PCS
2X16	25X30	500/PCS
2X18	25X30	500/PCS
2X20	25X30	500/PCS