

A

B

C

D

E

SPECIFICATIONS

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 100V AC/ max.

Operating Temp.: -25°C ~ +85°C




Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 800V AC/ min.

Contact Resistance: 20m Ω / max.

Material

Material: Nylon 66, UL94V-0

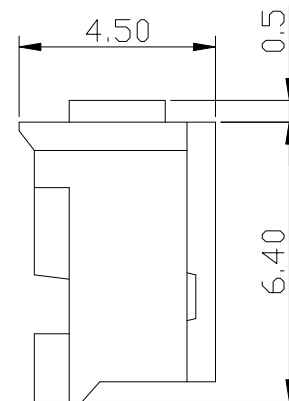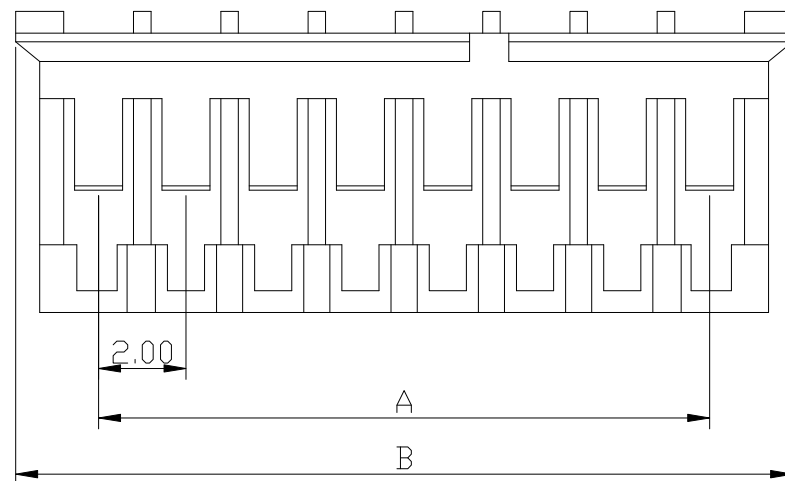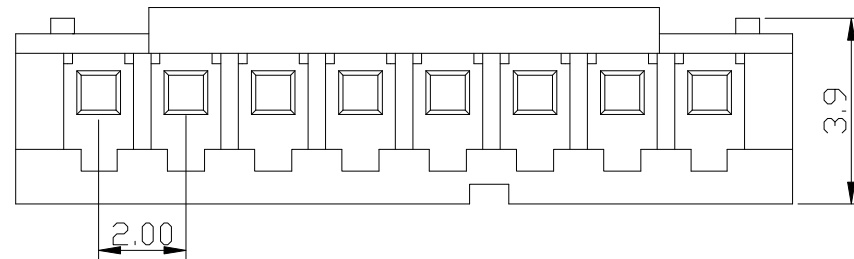

Poles	Dimension mm (in.)		Part No.
	A	B	
02	2.0(0.079)	5.8(0.228)	CP-H20-02
03	4.0(0.157)	7.8(0.307)	CP-H20-03
04	6.0(0.236)	9.8(0.386)	CP-H20-04
05	8.0(0.315)	11.8(0.465)	CP-H20-05
06	10.0(0.394)	13.8(0.543)	CP-H20-06
07	12.0(0.472)	15.8(0.622)	CP-H20-07
08	14.0(0.551)	17.8(0.701)	CP-H20-08
09	16.0(0.630)	19.8(0.780)	CP-H20-09
10	18.0(0.709)	21.8(0.858)	CP-H20-10
11	20.0(0.787)	23.8(0.937)	CP-H20-11
12	22.0(0.886)	25.8(1.016)	CP-H20-12
13	24.0(0.945)	27.8(1.094)	CP-H20-13
14	26.0(1.024)	29.8(1.173)	CP-H20-14
15	28.0(1.102)	31.8(1.252)	CP-H20-15
16	30.0(1.181)	33.8(1.331)	CP-H20-16



承洧科技股份有限公司
Chereng Wee Technology Corp.

DESCRIPTION(內容)

2.0mm Wire-to-Board Housing
(RoHS)

PART NO:
(料號) CP-H20-XX

DWG NO(圖號): 2000J-H

DRAWN(製圖)

Gong

CHECKED(確認):

Mandy

APPROVAL(核准):

Johnny

GENERAL TOLERANCE:

(公差)

X.XX $\pm$ 0.2
X.X $\pm$ 0.3

SCALE(比例):

Free



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

變更環保章字樣

2014年P數編碼統一兩碼

DATE

2006.01.18

2006.07.10

2006.08.15

2014.10.07

A

B

C

D

E

CF121