

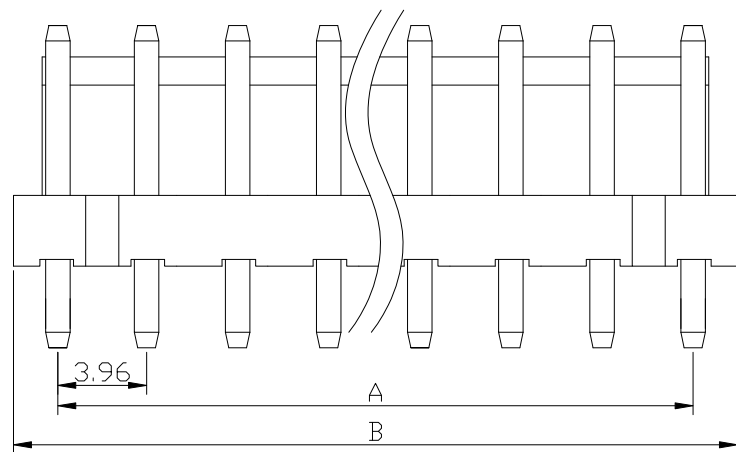


RECOMMENDED P.C.BOARD HOLE DIMM.

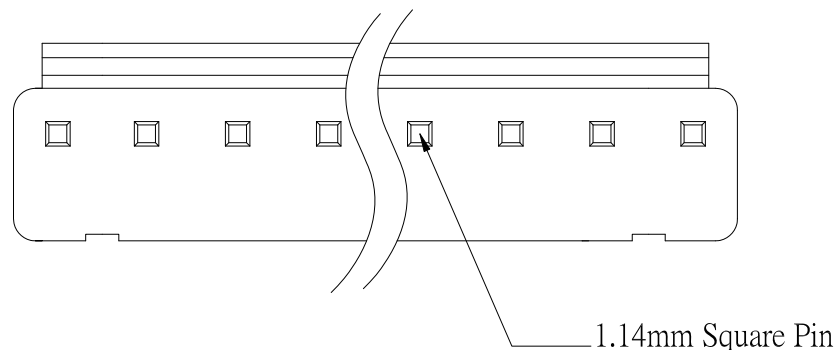

Specifications

Current Rating: 5A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0

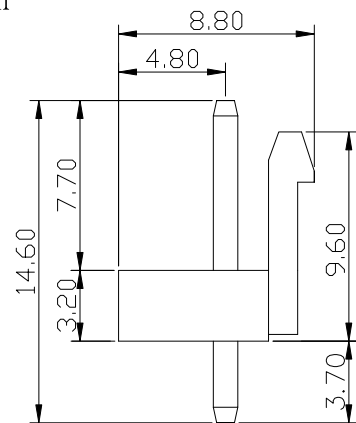

Poles	Dimension mm (in.)		Part No.
	A	B	
02	3.96 (0.156)	7.92 (0.312)	CV-W3961-02
03	7.92 (0.312)	11.92 (0.469)	CV-W3961-03
04	11.88 (0.468)	15.84 (0.624)	CV-W3961-04
05	15.84 (0.624)	19.84 (0.781)	CV-W3961-05
06	19.80 (0.780)	23.80 (0.937)	CV-W3961-06
07	23.76 (0.935)	27.88 (1.098)	CV-W3961-07
08	27.72 (1.074)	31.74 (1.250)	CV-W3961-08
09	31.68 (1.247)	35.86 (1.412)	CV-W3961-09
10	35.64 (1.403)	39.90 (1.571)	CV-W3961-10
11	39.60 (1.559)	43.84 (1.726)	CV-W3961-11
12	43.56 (1.715)	47.92 (1.887)	CV-W3961-12



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):
3.96mm Wire-to-Board Header
DIP 180° Type (RoHS)

PART NO:
(料號) CV-W3961-XX
DWG NO(圖號): 3961VH-XX-ST

DRAWN(製圖):
GONG

CHECKED(確認):
TERESA

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)

X.XX ± 0.35
X.X ± 0.5

SCALE(比例):
FREE



REV:
R6

UNIT:
mm

SIZE:
A4
SHEET:
1/1

REV

R1
R2
R3
R4

R5
R6

DESCRIPTION

環保料
更改環保章字樣
增加15Pin尺寸
補充宏備註
2014年Pin數料號編碼統一
變更可生產PIN數

DATE

2006.06.29
2006.09.04
2006.10.13
2006.10.20
2014.09.17
2017.03.13