


A

B


C

D

E

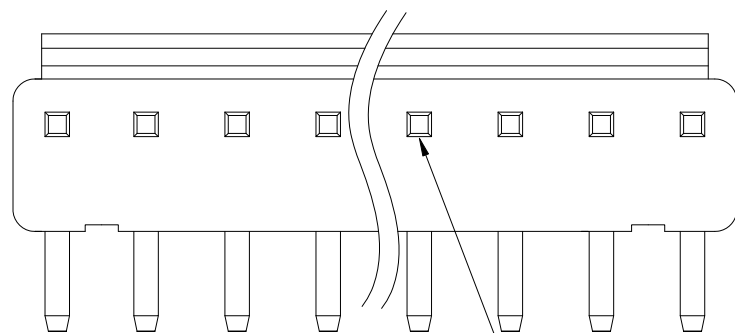

1.14mm Square Pin

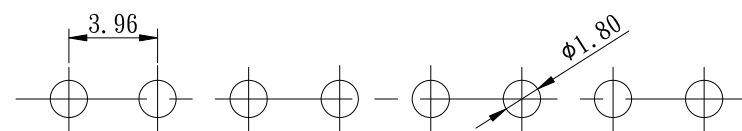

RECOMMENDED P.C.BOARD HOLE DIMM.



SPECIFICATIONS

Current Rating: 7A AC, DC

Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C



Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding Voltage: 1500V AC,DC minute

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

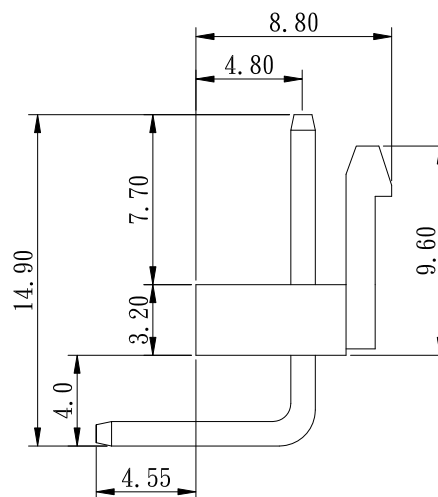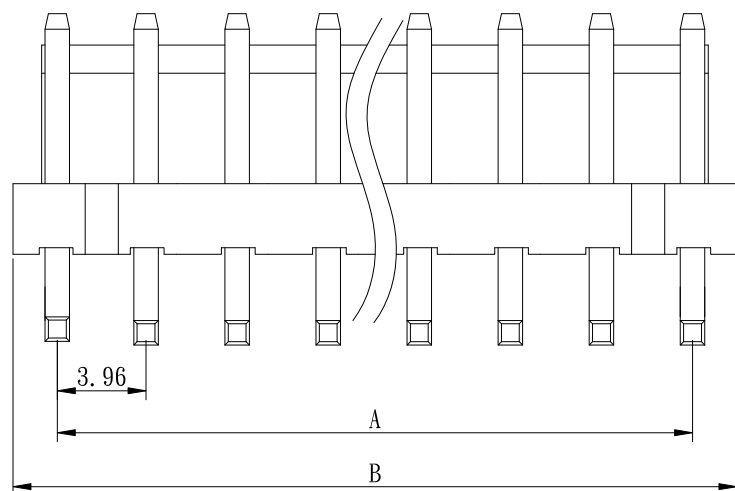

Poles	Dimension mm (in.)		Part No.
	A	B	
02	3.96 (0.156)	7.92 (0.312)	CV-W3961R-02
03	7.92 (0.312)	11.92 (0.469)	CV-W3961R-03
04	11.88 (0.468)	15.84 (0.624)	CV-W3961R-04
05	15.84 (0.624)	19.84 (0.781)	CV-W3961R-05
06	19.80 (0.780)	23.80 (0.937)	CV-W3961R-06
07	23.76 (0.935)	27.88 (1.098)	CV-W3961R-07
08	27.72 (1.074)	31.74 (1.250)	CV-W3961R-08
09	31.68 (1.247)	35.86 (1.412)	CV-W3961R-09
10	35.64 (1.403)	39.90 (1.571)	CV-W3961R-10
11	39.60 (1.559)	43.84 (1.726)	CV-W3961R-11
12	43.56 (1.715)	47.92 (1.887)	CV-W3961R-12



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

3.96mm Wire-to-Board Header
DIP 90° Type (RoHS)

PART NO:
(料 號) CV-W3961R-XX

DWG NO(圖號): 3961VH-XX-RT

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X.XX ± 0.35
X.X ± 0.5

SCALE(比例):

FREE



REV:

R8

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R3

R4

R5

R6

R7

R8

DESCRIPTION

增加15Pin的尺寸
補充備註
修正尺寸(14.60→14.90)
修正額定電流(原:5A)

2014年PIN數料號編碼統一

變更可生產PIN數

DATE

2006.10.13
2006.10.20
2008.05.07
2013.09.11

2014.09.17

2017.03.13

A

B

C

D

E

CF091