
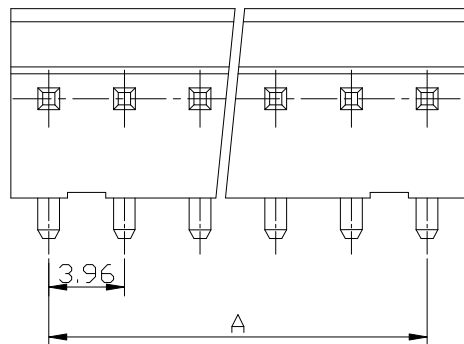
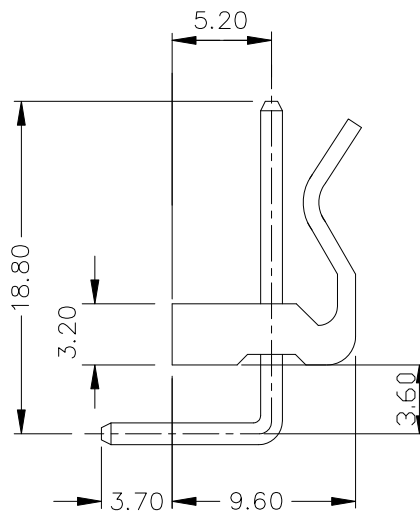


RECOMMENDED P.C.BOARD HOLE DIMM.

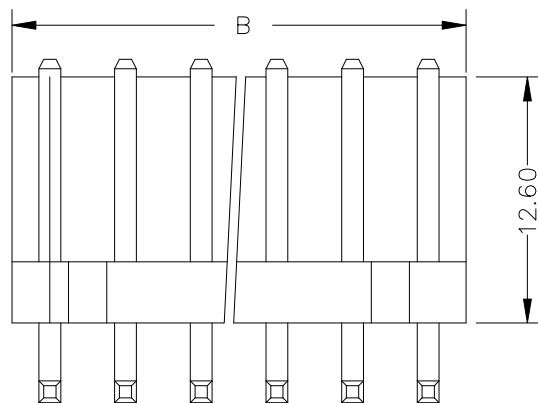

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10m Ω / max.

Material

Material: Nylon66, UL94V-2



Poles	Dimension mm		Part No.	Note.
	A	B		
02	3.96	8.00	CW-W396R-02	
03	7.92	12.00	CW-W396R-03	
04	11.88	15.90	CW-W396R-04	
05	15.84	20.00	CW-W396R-05	
06	19.80	24.00	CW-W396R-06	
07	23.76	27.90	CW-W396R-07	
08	27.72	31.90	CW-W396R-08	
09	31.86	35.80	CW-W396R-09	
10	35.64	39.90	CW-W396R-10	
11	39.60	43.90	CW-W396R-11	
12	43.56	47.80	CW-W396R-12	



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):
3.96mm Wire-to-Board Header
Dip 90° Type(RoHS)

PART NO:
(料號) CW-W396R-XX

DWG NO(圖號): 3961-XX-RT

DRAWN(製圖):
GONG

CHECKED(確認):
TERESA

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)

X.XX $\pm$ 0.35
X.X $\pm$ 0.5

SCALE(比例):
FREE



REV:
R4

UNIT:
mm

SIZE:
A4
SHEET:
1/1

REV

R0
R1

R2
R3
R4

DESCRIPTION

環保料
變更環保章字樣
修改俯視圖
13PIN-20PIN無生產
2014年8月料號P數編碼統一兩碼

DATE

2006.03.20
2006.06.28
2006.08.14
2006.09.28
2015.06.10