

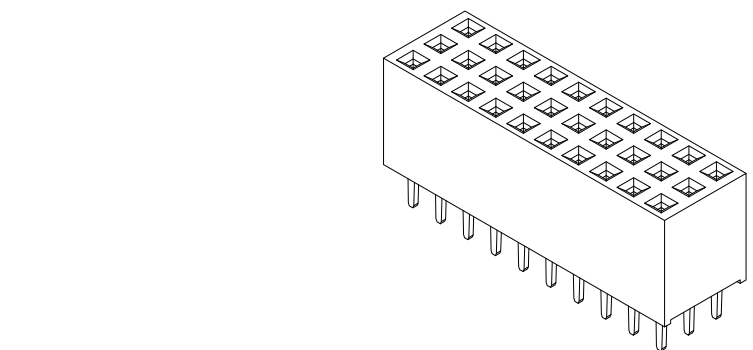
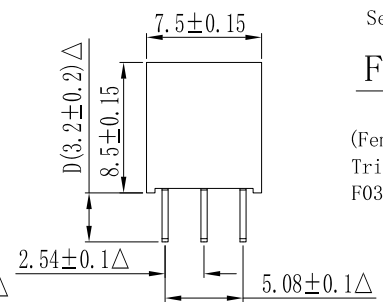


SPECIFICATIONS

Current Rating : 3Amp
Insulator Resistance : 5000 Megohms min.
Contact Resistance : 20 M ohms max.
Dielectric Withstanding : AC 1000V
Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Material : Brass
Insulator Material : Polyester, UL 94V-0
Standard : P. B. T.
Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over

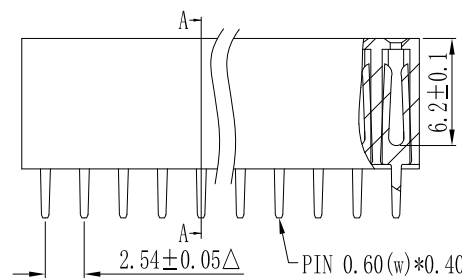

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts
F031	X	X	X	DXXX	-XX
(Female Header Triple Row) F031 (2.54 H:8.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin F: Gold Flash/Tin 30U" (Standard: G)	P: PBT C: LCP N: Nylon-6T N1: Nylon-9T (Standard: P)	S-D D032 (Standard: S-D032)	(09 TO 96 Contacts)



DESCRIPTION(内容): 2.54mm Female Header H:8.5 W:7.5 180° (RoHS)	DRAWN(製圖): 邓文广	GENERAL TOLERANCE: (公差) .X .XXXX .XX .X° .XXX .XX°	REV: A/1	REV 1	DESCRIPTION △此符號表示重點管控尺寸	DATE 2019.11.13
	CHECKED(確認): 邓文广		UNIT: mm			
	PART NO: (料號) F031-SG_-D032-XX		SIZE: A4			
	DWG NO(圖號):		SHEET: 1/1			
	APPROVAL(核准): Jimmy		SCALE(比例): XX:XX			