



A

B

C

D



E

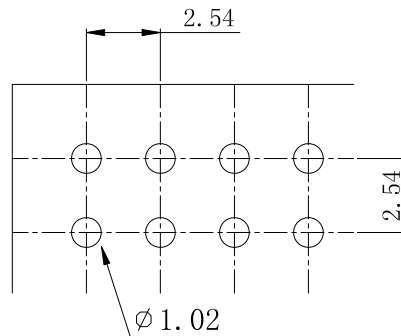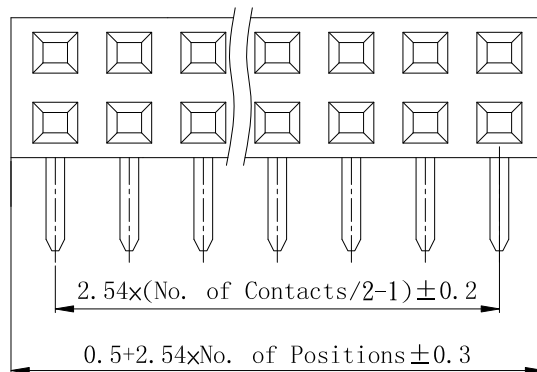

P.C.B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

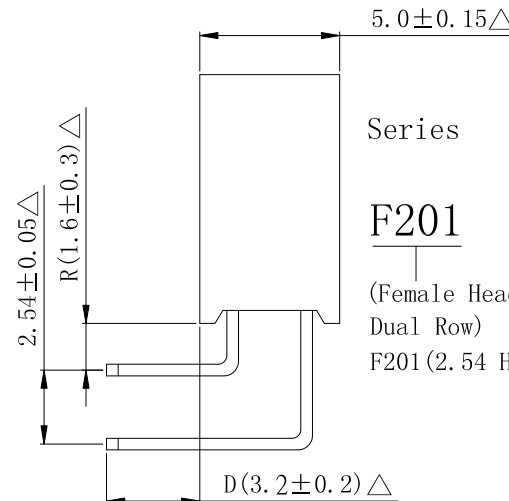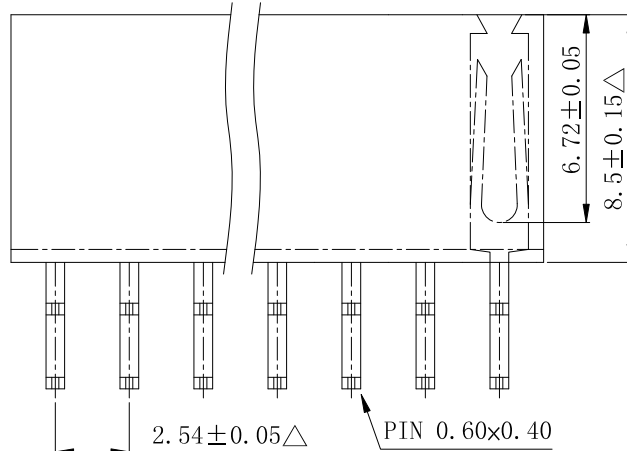

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F201	X	X	X	DXXX	-XX
(Female Header Dual Row) F201 (2.54 H:8.5)	R:Right Angle R:1.6mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T C:LCP (Standard:P)	R-D D032 (Standard:R-D032)	(04 TO 80 Contacts)



DESCRIPTION(内容)

2.54mm Female Header H:8.5 W:5.0 90°
(RoHS)PART NO:
(料 號)

F201-RG_-D032-XX

DWG NO(圖號):

DRAWN(製圖)
GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差).X
.XX
.XXX.XXXX
.X°
.XX°

SCALE(比例):

1:XX

REV:
R1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

新增LCP材質選項

DATE

2006.11.09

2016.06.24

A

B

C

D

E