
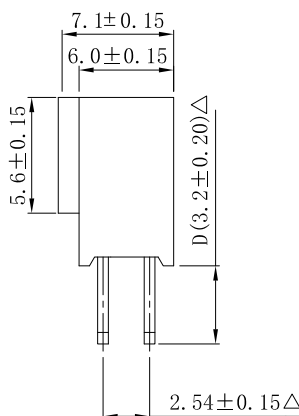


P. C. B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/LCP/NL-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

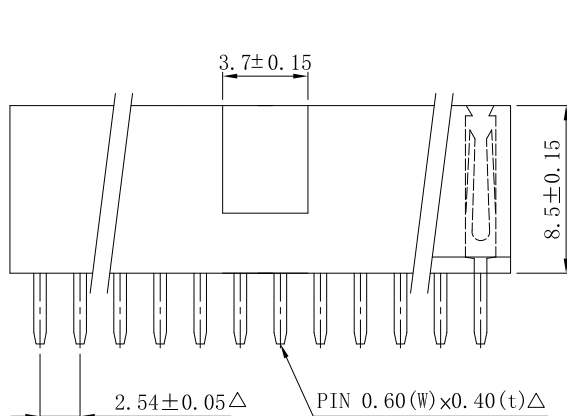

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts	Other
F201	X	X	X	DXXX	-XX	-H
(Female Header Single series) F201 (2.54 H:8.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT C: LCP N: Nylon-6T (Standard: P)	S-D D032 (Standard: S-D030)	(04 TO 80 Contacts)	H: 帶防呆無倒角