

A

B



C

D


E

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

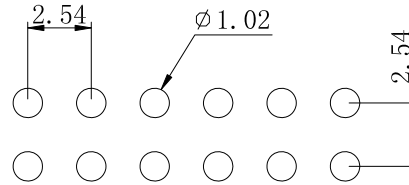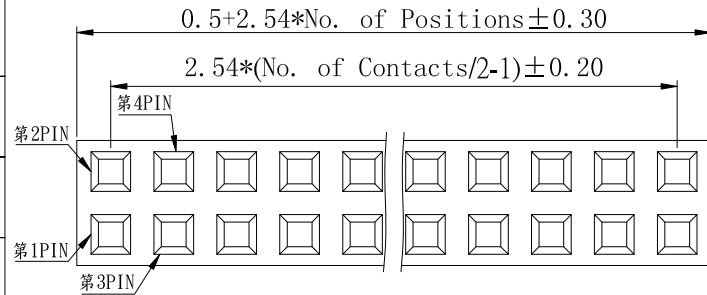

PCB LAYOUT

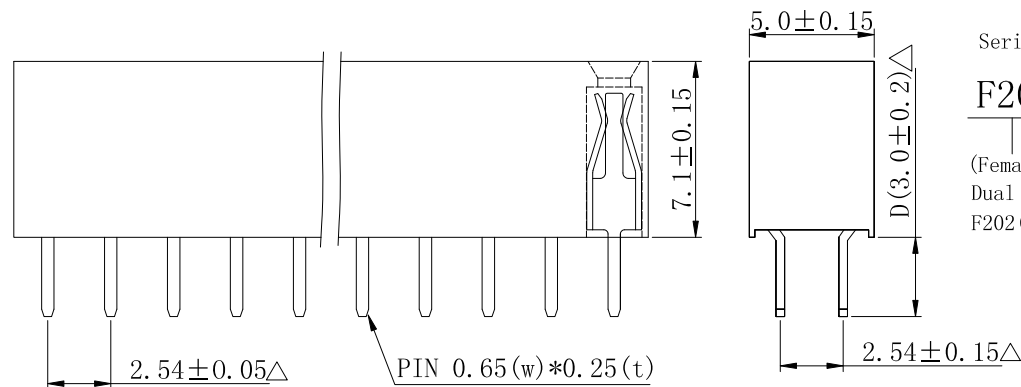

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F202	X	X	X	DXXX	-XX
(Female Header Dual Row) F202 (2.54 H:7.1)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(04 TO 80 Contacts)



DESCRIPTION(内容):

2.54mm Female Header 180° H:7.1 W:5.0 (RoHS)

PART NO:
(料 號) F202-SG_-D030-XX

DWG NO(圖號):

DRAWN(製圖):
黃炳秋CHECKED(確認):
黃炳秋APPROVAL(核准):
鄧文廣GENERAL TOLERANCE:
(公差)X. ±0.30 X. ° ±5.0°
.X ±0.20 .X ° ±3.0°
.XX ±0.15 .XX ° ±1.0°SCALE(比例):
1:XXREV:
A/4UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

舊料號: CCPBA710S02×XX

舊料號: F202-XXSGP-D030

修改总长尺寸公式(ECR20150602-1)

DATE

2005.08.13

2005.12.04

2005.06.03

2015.06.02

A

B

C

D

E