

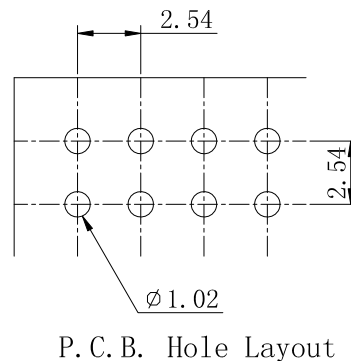
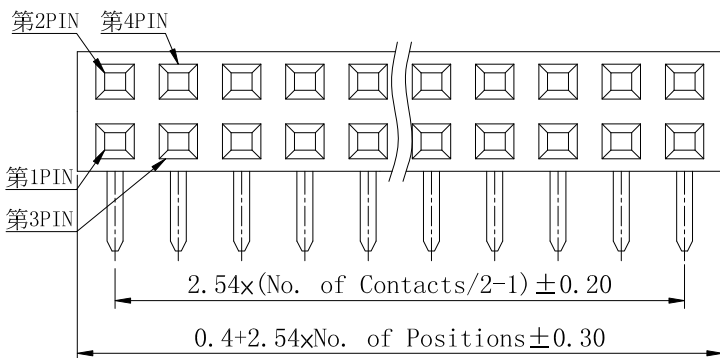


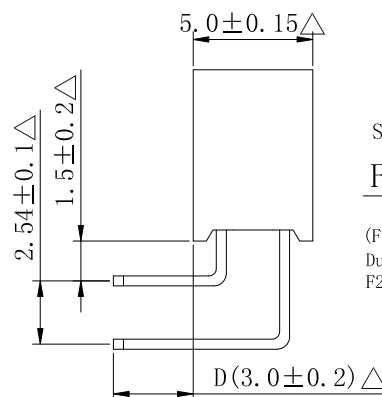

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0

Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over

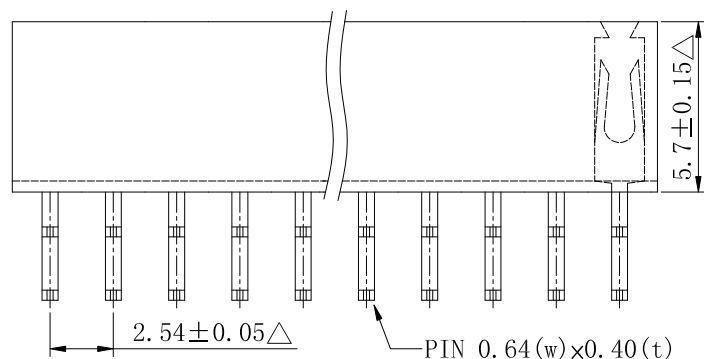

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F203	X	X	X	DXXX	-XX
(Female Header Dual Row) F203 (2.54 H:5.7)	R:Right Angle	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ⊙Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T (Standard:P)	R-D D030 (Standard:R-D030)	(04 TO 80 Contacts)

△ 此符號表示重點管控尺寸