

A



B

C

D

E

1

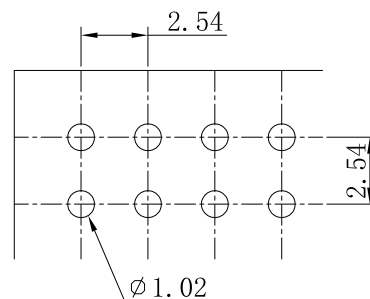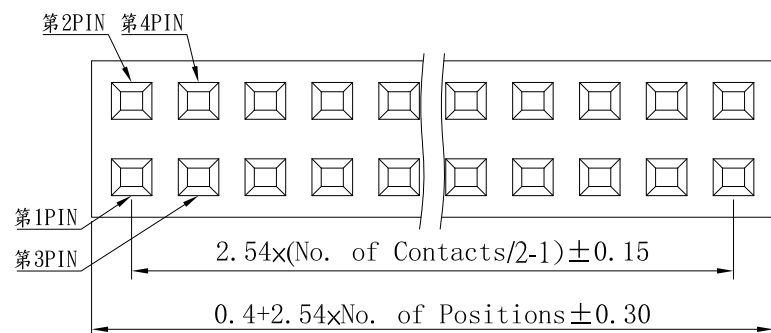



P.C.B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	



2

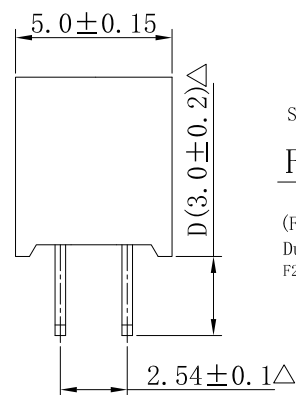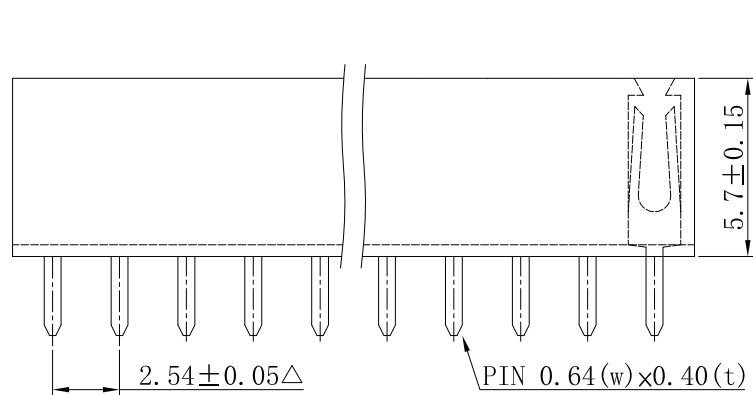

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts
F203	X	X	X	DXXX	-XX
(Female Header Dual Row) F203 (2.54 H:5.7)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	C: LCP P: PBT N: Nylon-6T N1: Nylon-9T (Standard: N)	S-D D030 (Standard: S-D030)	(04 TO 80 Contacts)

3



DESCRIPTION(內容): 2.54mm Female Header H:5.7 W:5.0 180° (RoHS)	DRAWN(製圖): 邓文广	GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE	
	CHECKED(確認): 邓文广	.X .XX .XXX	. XXXX .X ° .XX °	UNIT: mm				1
		APPROVAL(核准): Jimmy	SCALE(比例): XX:XX		SIZE: A4	2		
					SHEET: 1/1	3		
PART NO: (料 號) F203-SG_-D030-XX					4			
DWG NO(圖號):								

A

B

C

D

E