

A

B



C

D

E

$$0.40+2.54*\text{No. of Positions}\pm 0.3$$



$$2.54*(\text{No. of Contacts}/2-1)\pm 0.2$$

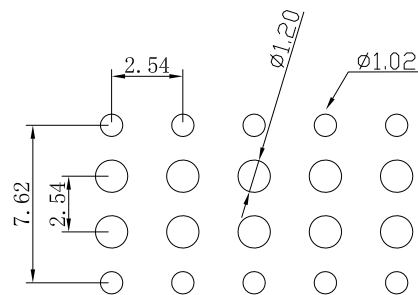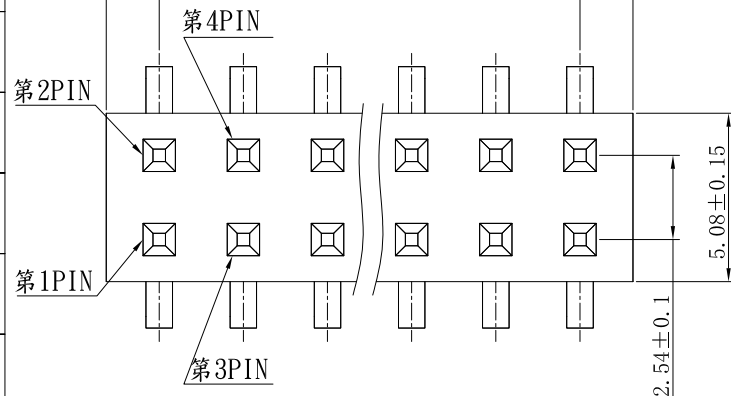

P.C.B Hold Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/PBT/LCP
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

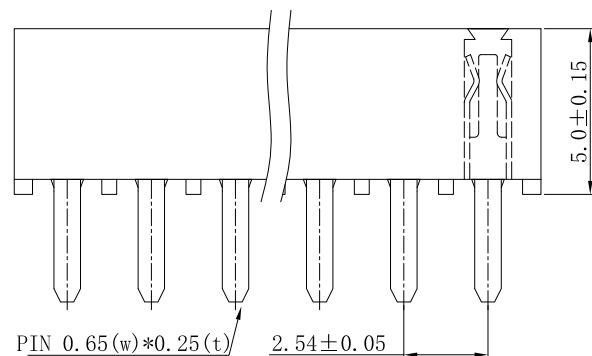

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F294	X	X	X	DXXX	-XX
(Female Header Dual Row) F294(2.54 H:5.0 With stand off)	L:蜈蚣腳 L1:7.62MM	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT C:LCP N:Nylon-6T N1:Nylon-9T (Standard:N)	L-D D030 (Standard:L-D030)	(04 TO 80 Contacts)



DESCRIPTION(内容):

2.54mm Female Header H:5.0 蜈蚣腳排母 (RoHS)

PART NO:
(料 號) F294-L1G_-D030-XX

DWG NO(圖號):

DRAWN(製圖):

鄧文廣

CHECKED(確認):

鄧文廣

APPROVAL(核准):

Jimmy

GENERAL TOLERANCE:

(公差)

.X	.XXXX
.XX	.X °
.XXX	.XX °

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2019.11.13

A

B

C

D

E