
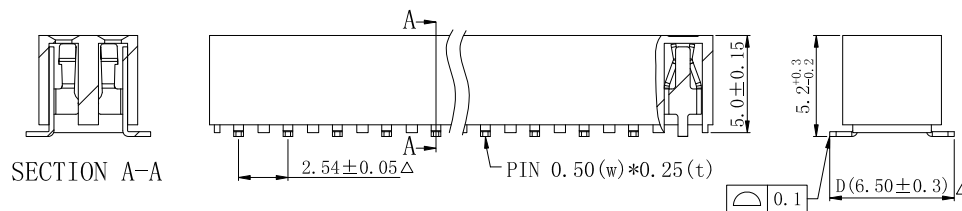


P.C.B Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

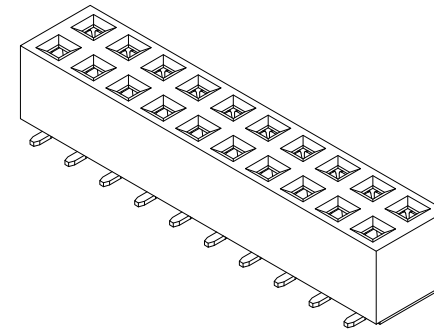

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F294	X	X	X	DXXX	-XX
(Female Header Dual Row)	M:SMT Type	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D065 (Standard:M-D065)	(04 TO 80 Contacts)



DESCRIPTION(内容):

2.54mm Female Header H:5.0 W:5.08
Nylon-6T SMT (RoHS)

PART NO:
(料 號)

F294-MGN-D065-XX

DWG NO(圖號):

DRAWN(製圖):
黃玉美

CHECKED(確認):
鄧文廣

APPROVAL(核准):

鄧文廣

GENERAL TOLERANCE:
(公差)

.X	.XXXX
.XX	.X °
.XXX	.XX °

SCALE(比例):
1:XX



REV:
A/4

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

☒ 數字方框為必測尺寸

舊料號: CCPBA50002x8S

舊料號: F294-XXMGN-D065

塑膠總長加膠有變動

DATE

2005.08.13

2005.12.04

2006.06.10

2007.02.26