
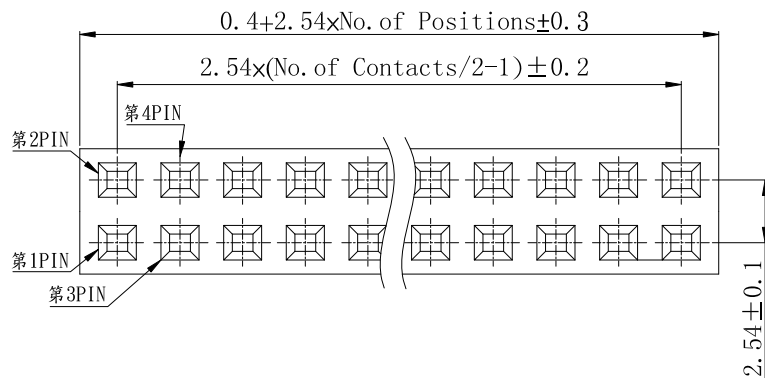



P. C. B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:−40℃ ~ +105℃
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

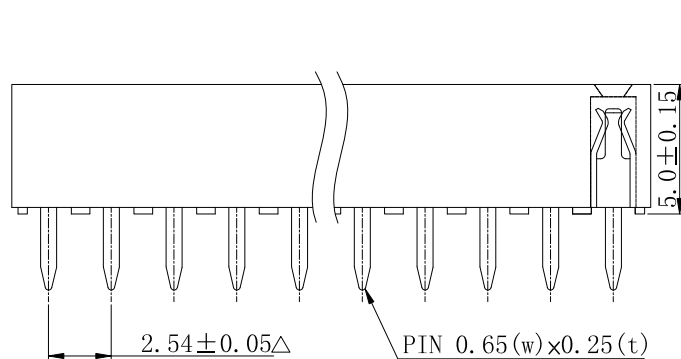

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>F294</u>	<u>X</u>	<u>X</u>	<u>X</u>	<u>DXXX</u>	<u>-XX</u>
(Female Header Dual Row) F294(2.54 H:5.0 W:5.08)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ◎ Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(04 TO 80 Contacts)

DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.54mm Female Header H:5.0 W:5.08 180° (RoHS)	劉建平	(公差)	A/4			
PART NO: (料號) F294-SG_-D030-XX	CHECKED(確認): 劉建平	.X .XXX .XXX	UNIT: mm	1	△此符號表示重點管控尺寸	2005.08.13
DWG NO(圖號):	APPROVAL(核准): 邓文广	SCALE(比例): XX:XX	SIZE: A4	2	舊料號: CCPBA500S02×XX(3.0)	2005.12.04
			SHEET: 1/1	3	舊料號: F294-XXSGP-D030	2006.06.05
				4	塑膠總長加膠有變動	2007.02.26