


P.C.B. Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over
Note:	
Duplex plating:	Gold Plated on contact area, Tin on solder area

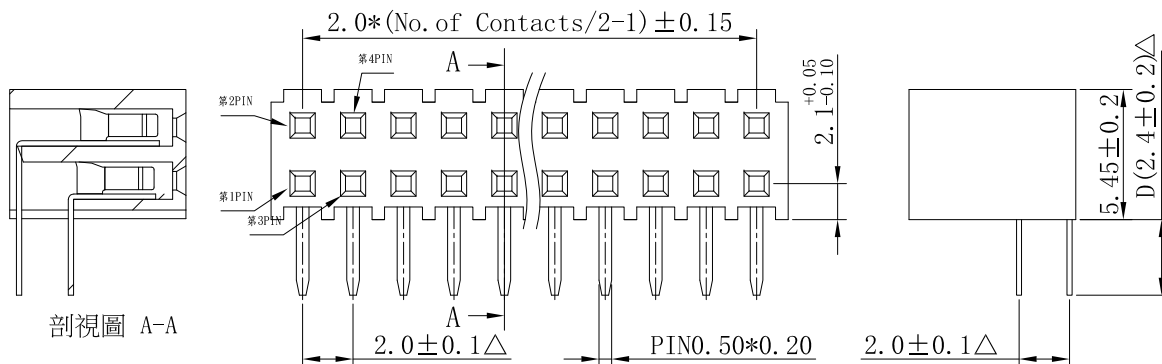

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts
F407	X	X	X	- DXXX	-XX
(Female Header Dual row) F407 (2.00 H:7.2 W:5.45)	R:Right Angle	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT C:LCP N:Nylon-6T N1:Nylon-9T (Standard:N)	R-D D024 (Standard:S-D024)	(04 TO 80 Contacts)



DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.0mm Female Header H:7.20 W:5.45 波浪型 (RoHS)	邓文广	(公差)	A/1			
PART NO: (料號) F407-RG_-D024-XX	CHECKED(確認): 邓文广	.X .XX .XXX	UNIT: mm	1	△此符號表示重點管控尺寸	2019.11.13
DWG NO(圖號):	APPROVAL(核准): Jimmy	SCALE(比例): 1:XX	SIZE: A4	2		
			SHEET: 1/1	3		
				4		