



A

B

C

D


E

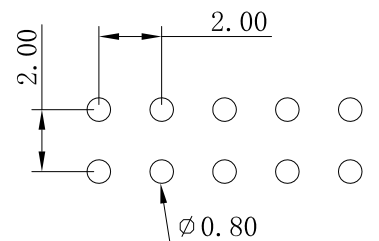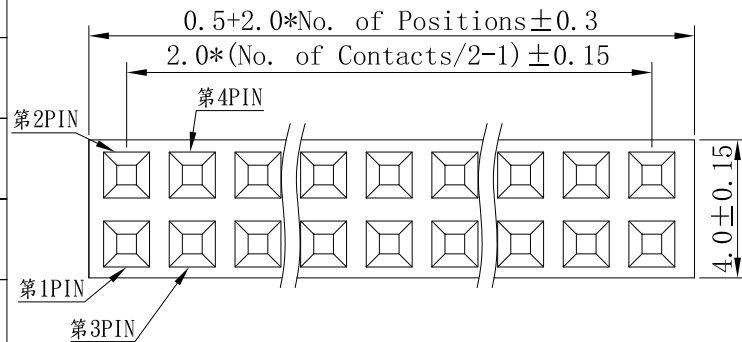

P.C.B. Layout

Specifications

Current Rating :2 Amp
Insulator Resistance :3000 Megohms Min.
Contact Resistance :20 m ohms max.
Dielectric Withstanding :AC 500 V
Operating Temperature :-40 °C ~ +105°C
Contact Material :Phosphor Bronze.
Insulator Material :Polyester, UL 94V-0
Standard :P. B. T
Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over
Note:
Duplex plating: Gold Plated on contact area,
Tin on solder area

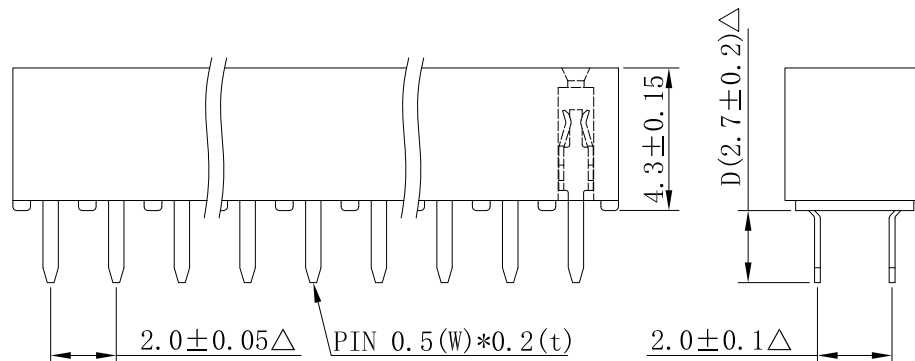

Series

F491

(Female Header
Dual Row)F491 (2.00 H:4.3W:4.0
With stand off)Connector
Type

X

S:Strnight Type

Contact
Plating

X

G:Gold Flash
T:Tin Plated
A:10U"Gold
B:15U"Gold
C:20U"Gold©Duplex Plating
D:Gold Flash/Tin
(Standard:G)

Material

X

P:PBT
C:LCP
N:Nylon-6T
NI:Nylon-9T
(Standard:P)

Pin Length mm

DXXX

S-D

D027

(Standard:S-D027)

Number of
Contacts

-XX

(04 TO 80
Contacts)

CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):

2.0mm Female Header 180° H:4.3 W:4.0
(RoHS)PART NO:
(料 號)

F491-SG_-D027-XX

DWG NO(圖號):

DRAWN(製圖):

邓文广

CHECKED(確認):

邓文广

APPROVAL(核准):

Jimmy

GENERAL TOLERANCE:

(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2019.11.13

A

B

C

D

E

FILE NO: CWJ-4E-09