


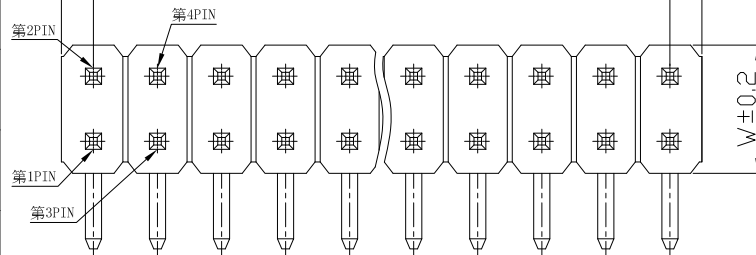
A

B

C

D

E

 $2.54 * \text{No. of positions} \pm 0.5$ $2.54 * (\text{No. of contacts} / 2 - 1) \pm 0.25$ 

P. C. B Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/LCP/NL-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P221</u>	-	<u>X</u>	<u>X</u>	<u>A / C / B</u>	- <u>X X</u>
(Pin Header Dual Row)	R: Right Angle Type R1: 1.5mm ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T C: LCP (Standard: P)	A (060) C (025) B (030) (If you desire on other length, by marking put desired in the A/C/B)	(02-80 Contacts)

Selectivity:

- ☐ P221 (H: 2.54 W: 2.54) (Material (Standard): PBT)
- ☐ P222 (H: 1.7 W: 2.54) (Material (Standard): Nylon-6T)
- ☐ P223 (H: 1.5 W: 2.54) (Material (Standard): Nylon-6T)

Dim(6.0/2.5/3.0):

A: _____ C: _____ B: _____

A

B

C

D

E



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):

2.54mm Pin Header H:2.54 90° □=0.64 (RoHS)PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):
1:XXREV:
A/1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1**2****3****4**

DESCRIPTION

△此符號表示重點管控尺寸

DATE